

A934-212C-044

TOUCH SCREEN CONTROL SYSTEM



DESCRIPTION

The ABtUS A934-212C-044 touch control panel uses a standard 4-wire resistive touch panel, which allows up to a total of 32 command code with complete user programmable software.

User friendly Software which allows customized programming such as macros setting, feedback events, control commands, etc. Another characteristic is the panel button layout and design, it can be easily customized and print out accordingly with icons or clear text buttons

FEATURES

- Feature with automatic backlight fade out
- Macro definitions setting can be assign for every single button up to 16 difference order
- Default 3x4 matrix of 12 touch buttons
- With 1 x RS-232 or 1 x RS-485 selectable and 1 x RS-232
- Ultra low power consumption

TECHNICAL SPECIFICATION

INPUT VOLTAGE: 12V-DC, 350mA

BACK LIGHT: With white LED light guide plate

COMMUNICATION STANDARD: RS-232 or RS485 (*Selectable)
1 x RS-232 or 1x RS-485

CONFIGURABLE COM PORT: (7 or 8 Data Bit and 1 or 2 Stop Bit)
Baud Rate (9600 to 38400)
Parity Bit (Non, Even or Odd)

TOTAL NUMBER OF BUTTON: 12

TOTAL NUMBER OF COMMAND SET ALLOW: 32

STANDBY CURRENT: 35mA


OPERATION CURRENT: 65mA

HOUSING: ABS

DIMENSIONS: 88 x 88 x 16 mm

WEIGHT: 75g

ACCESSORIES: AC-DC Power Adaptor 12V-DC, 350mA
1 x 2 Pin, 2 x 3 Pin Terminal Block

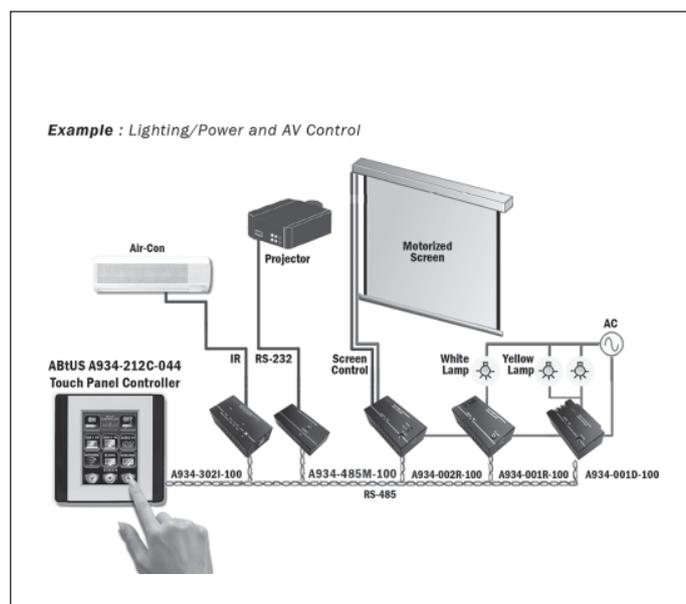

TYPICAL APPLICATIONS

Any professional control system requiring multiple lighting/dimming or environmental control.

- Schools (Media Classrooms) • Churches • Corporate Applications (Meeting Rooms)
- Home Automation • Home Theaters • Hotels In Room Control

* Specifications are subject to change without notice.