



# CS52

## 2-Port Hybrid™ KVM Switch



### Diagram

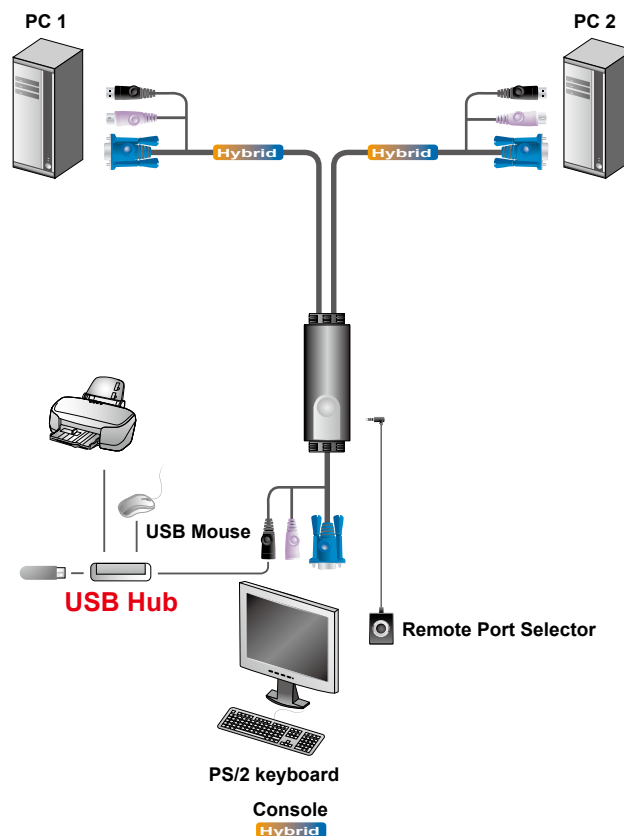

### Features

- One console (monitor, PS/2 keyboard, and USB mouse) controls two computers
- Remote port selector for convenient switch placement
- Supports multi-function mice
- USB 2.0 mouse port can be used for USB hub and USB Peripheral Sharing
- Compact design, built in all-in-one cables (console 0.15m; computers 0.6m, 1.2m)
- Superior video quality- up to 2048 x 1536; DDC2B
- Auto Scan function to monitor computer operation
- Non-powered

### Specifications

Function			CS52
Computer Connections			2
Port Selection			Hotkey, Pushbutton
Connectors	Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x USB Type A Female (Black)
	KVM Ports	Keyboard	2 x 6-pin Mini-DIN Male (Purple))
		Video	2 x HDB-15 Male (Blue)
		Mouse	2 x USB Type A Male (Black)
Remote Port Selector		1 x Mini Stereo Jack	
Switches	Port	1 x Pushbutton	
LEDs	Selected	2 (Green)	
Cable Length	Console	0.15m	
	Computers	0.6m, 1.2m	
Emulation	Keyboard	PS/2	
Video	2048 x 1536; DDC2B		
Scan Interval	3, 5, 10, 20 Seconds		
Environment	Operating Temp.	0-50° C	
	Storage Temp.	-20-60° C	
	Humidity	0 - 80% RH, Non-condensing	
Physical Properties	Housing	Plastic	
	Weight	0.33 kg	
	Dimensions (L x W x H)	8.45 x 3.40 x 2.13 cm	

\* The specifications and pictures are subject to change without notice.

#### Headquarters

ATEN International CO., Ltd.  
3F, No.125, Sec. 2, Datung Rd. Sijhih City, Taipei 221, Taiwan  
Tel: 886-2-8692-6789 Fax: 886-2-8692-6767 E-mail : online@aten.com.tw